

定位柱·有螺栓和溝 EH 22050.



產品描述

適用於定位、供壓或頂舉。

材質

- 螺絲形支撐座
- 切削鋼，硬化，染黑
 - Stainless Steel 1.4305, nitrided

本體


- 切削鋼，染黑
- 不鏽鋼 1.4305

彈簧


- 不銹鋼

特性

- 標準彈簧荷重: 無標示
強化彈簧荷重: 以兩條線標示



Standard spring load



Heavy spring load

更多資訊


注意事項

特殊的樣式歡迎洽詢。
定位柱經過特別測試，以得知其彈簧的範圍和作用。

參考

需求的螺紋鎖，請參閱附錄 - 技術數據 -

圖面

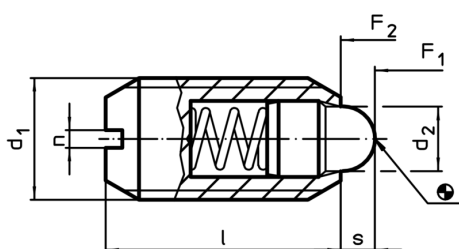

訂單資訊

d ₁	尺寸			行程 s	彈簧荷重 ¹⁾		max. [°C]	[g]	品號
	d ₂	l	n		F ₁ ~	F ₂ ~			
切削鋼，標準彈簧荷重									
M 4	1,8	9	0,6	1,5	4,5	12,5	250	0,4	22050.0104
M 5	2,4	12	0,8	2,0	5,0	13,0	250	1,1	22050.0105
M 6	2,7	14	1,0	2,0	6,0	17,0	250	1,8	22050.0106
M 8	3,8	16	1,2	2,0	16,0	33,0	250	3,7	22050.0108
M10	4,5	19	1,5	2,5	19,0	42,0	250	7,1	22050.0110
M12	6,2	22	2,0	3,5	22,0	57,0	250	11,0	22050.0112
M16	8,5	24	2,0	4,5	38,0	78,0	250	23,0	22050.0116
M20	10,0	30	2,5	6,5	39,0	81,0	250	46,0	22050.0120
M24	13,0	34	3,0	8,0	72,0	155,0	250	73,0	22050.0124
切削鋼，增強彈簧荷重									
M 6	2,7	14	1,0	2,0	11,0	25,0	250	1,8	22050.0306
M 8	3,8	16	1,2	2,0	23,0	59,0	250	3,8	22050.0308
M10	4,5	19	1,5	2,5	20,0	54,0	250	7,0	22050.0310
M12	6,2	22	2,0	3,5	38,0	96,0	250	11,0	22050.0312
M16	8,5	24	2,0	4,5	50,0	100,0	250	23,0	22050.0316
M20	10,0	30	2,5	6,5	52,0	133,0	250	46,0	22050.0320
M24	13,0	34	3,0	8,0	91,0	223,0	250	74,0	22050.0324

¹⁾ 統計平均值

尺寸				行程 s [mm]	彈簧荷重 ¹⁾		max. [°C]	[g]	品號
d ₁	d ₂ [mm]	l	n		F ₁ ~ [N]	F ₂ ~ [N]			
不銹鋼，標準彈簧荷重									
M 4	1,8	9	0,6	1,5	4,5	12,5	250	0,6	22050.0504
M 5	2,4	12	0,8	2,0	5,0	13,0	250	1,3	22050.0505
M 6	2,7	14	1,0	2,0	6,0	17,0	250	2,0	22050.0506
M 8	3,8	16	1,2	2,0	16,0	33,0	250	3,9	22050.0508
M10	4,5	19	1,5	2,5	19,0	42,0	250	7,2	22050.0510
M12	6,2	22	2,0	3,5	22,0	57,0	250	11,0	22050.0512
M16	8,5	24	2,0	4,5	38,0	78,0	250	23,0	22050.0516
M20	10,0	30	2,5	6,5	39,0	81,0	250	47,0	22050.0520
M24	13,0	34	3,0	8,0	72,0	155,0	250	74,0	22050.0524
不銹鋼，增加彈簧荷重									
M 6	2,7	14	1,0	2,0	11,0	25,0	250	2,0	22050.0706
M 8	3,8	16	1,2	2,0	23,0	59,0	250	4,0	22050.0708
M10	4,5	19	1,5	2,5	20,0	54,0	250	7,1	22050.0710
M12	6,2	22	2,0	3,5	38,0	96,0	250	11,0	22050.0712
M16	8,5	24	2,0	4,5	50,0	100,0	250	23,0	22050.0716
M20	10,0	30	2,5	6,5	52,0	133,0	250	47,0	22050.0720
M24	13,0	34	3,0	8,0	91,0	223,0	250	75,0	22050.0724

¹⁾ 統計平均值

應用範例

